



Highly efficient, self-cleaning liquid bypass filters!

The Tornado Model 602 is a continuously self-cleaning filter that protects analyzers from particulate in liquid samples. In normal operation, components of interest flow through the Tornado's element to the analyzer. Contaminants are shed by the element and removed through the Bypass port. The G.U.T.S.™ (Genie® Ultimate Thermoplastic Seal) gasket is an excellent alternative to expensive elastomers. It withstands radical temperature cycles without leaks due to its ability to maintain a bubble-tight seal even when thermocycled repeatedly from 0-300 °F. The multi-layer filter media consists of the support screen and flow screen. This results in more efficiency and easier installation and handling. The elements are self-cleaned by the flow of sample across them.



Technical Specifications

Maximum pressure rating	1,500 psig
Maximum recommended supply pressure	Lowest possible pressure consistent with application* *Must not exceed "Pressure rating" listed above
Maximum temperature	300 °F (148 °C)
Minimum Bypass flow rate	1.5 gal/min
Port sizes	Inlet, Outlet, & Bypass 1/2" female NPT
Internal volume	70 cc
Wetted materials	Machined parts: 316/316L stainless steel / NACE compliant All other metal parts: stainless steel / NACE compliant Sealing material: Kynar®

Product Brief

Applications

- Continuous liquid sampling in any process industry including natural gas, petrochemical, and oil refining
- Analyzer protection against particulate
- Liquid sample pre-conditioning

Benefits

- Helps preserve sample integrity
- Analyzer protection
- Quick and easy to install and maintain
- Quick and easy element inspection
- Economical

Features

- Self-cleaning tornado action
- Single element, multi-layer stainless steel filter media
- All connection ports on the housing
- Sample ports located at 90° angles
- G.U.T.S.™ seal
- Back mounting



Model Numbering & Additional Part Numbers


Your model number is determined by your specific needs. Choose options below.

Element rating	0.5 = 0.5 micron 2 = 2 micron 10 = 10 micron 25 = 25 micron 50 = 50 micron 100 = 100 micron
Kit quantity	Blank = Kit of 5 1 = Kit of 1
Mounting bracket accessory	Part # 602-509-SS (sold separately)

How to build the model number:




How to build the replacement filter element assembly and seal kit part number:

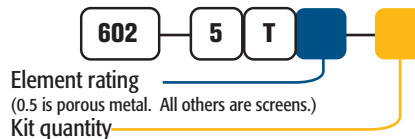


Dimensions

Side View

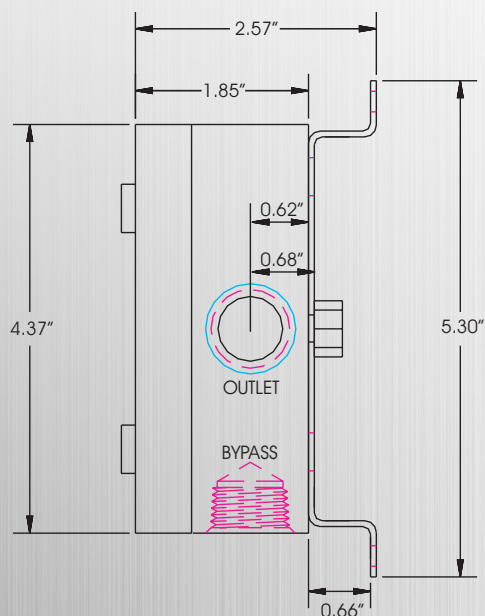

Front View

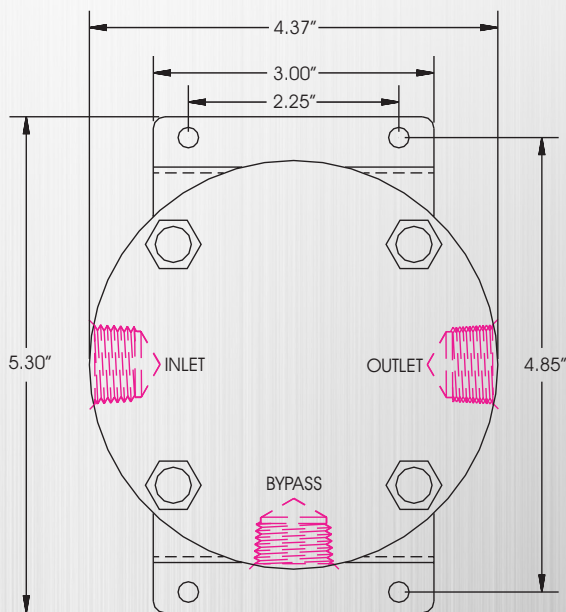

Local Distributor

A+ Corporation is the leader in Analytically Correct™ Sample Extraction and Conditioning Systems.

Contact us for expert product application assistance.

sales@geniefilters.com > 225.644.5255 > Fax 225.644.3975

41041 Black Bayou Road, Gonzales, LA 70737 An ISO 9001:2008 Certified Company

Tornado®, and Tornado Self Cleaning Filters® are trademarks or registered trademarks of A+ Corporation, LLC. All other referenced trademarks are the property of their respective owners. © 2012 A+ Corporation. All rights reserved. SCC-Tornado602-PS_121818